


2I610DW


2.5" Plus SBC supports 6th / 7th Gen Intel® Skylake-U / Kaby Lake-U CPU
VGA, 3 x Intel Gb Ethernet, 4DI / 4DO, 6 x USB, 2 x COM,
2 x Mini PCIe, SMBus

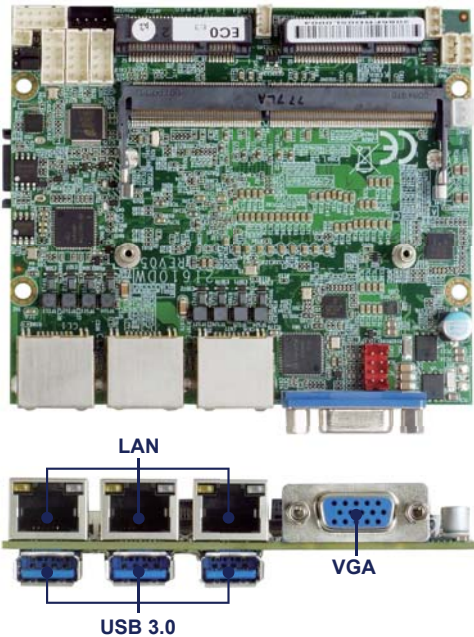

Features:

- 6th / 7th Gen Intel® Skylake-U / Kaby Lake-U, i7 / i5 / i3 / Celeron CPU
- 1 x DDR4 SODIMM socket, Max. 32GB
- Independent display: VGA
- 3 x Intel GbE LAN, 3 x USB 3.0, 3 x USB 2.0
- 2 x COM, 4DI / 4DO, 2 x Mini PCIe, SMBus

Dimensions: (Unit:mm)

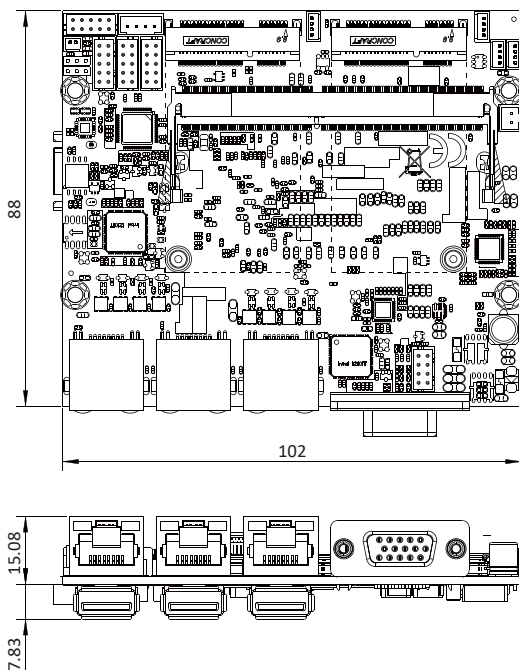

Specifications :

- CPU
6th / 7th Gen Intel® Skylake-U / Kaby Lake-U, i7 / i5 / i3 / Celeron CPU
- MB Chipset
Intel® Skylake-U / Kaby Lake-U SoC
- Graphics
Intel® HD Graphics, Support DirectX 12 & OpenGL 4.4 / 4.5
- System Memory
1 x DDR4 1866 / 2133 MHz SODIMM, Max. 32GB
- Storage
1 x SATA ports 3.0 Data transfer rates up to 6.0 Gb/s (600 MB/s)
1 x mini card socket for mSATA
- BIOS
Insyde UEFI BIOS
- Display
1 x VGA
- LAN
3 x Intel GbE (external)
- Expansion Interface
1 x Full size Mini PCIe (mSATA / USB)
1 x Full size Mini PCIe (PCIe / USB 2.0)

Expansion Module

Converter Card	CN066: Mini PCIe to M.2 E key 2230, WiFi 6 + BT
Mini Card	GPS, 3G / 4G, WI-FI, 2 / 4 x LAN, 4 x COM, CANBus, SDI / AHD Video
By Cable	Bluetooth, Digital I/O, 2 / 4 PoE, 4 x USB mini card

- USB
3 x USB 3.0 (external) ; 3 x USB 2.0 (internal)

USB Expansion

USB to	COM, Mini Card, M.2, Audio board
--------	----------------------------------

- Serial IO
2 x RS232 / 422 / 485 (internal)
*COM1, COM2 pin9 5V / 12V (Option)
- GPIO
Hardware digital Input & Output, 4 x DI / 4 x DO
- SMBus
1 x SMBus
- WDT
Hardware Watch Dog Timer, 0~255 sec programmable
- Power Input
Wide Range +9~36V
- Dimension
2.5" Plus (102 x 88 mm)
- Operation Temperature (100 % CPU Usage)
-20°C~70°C (Core i7 6600U)
- Operation Humidity
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
Box PC: SKY 2, TERA
- OS Support

7th Generation Intel® Core™ Processor family: Kaby Lake

Windows® 10 IOT (64bit)
Ubuntu 16.04.3 above, Fedora 26 above, CentOS 7.4 above

6th Generation Intel® Core™ Processor family: Skylake

Windows® 10 IOT (64bit) / Windows® 8.1 (64bit)
Windows® Embedded 8 Standard (64bit) / Windows® 7 (64bit)
Windows® Embedded Sta 7 (64bit)
Ubuntu 16.04.3 above, Fedora 26 above, CentOS 7.4 above